


Efficiently empty and meter large volume bags of feed and bedding

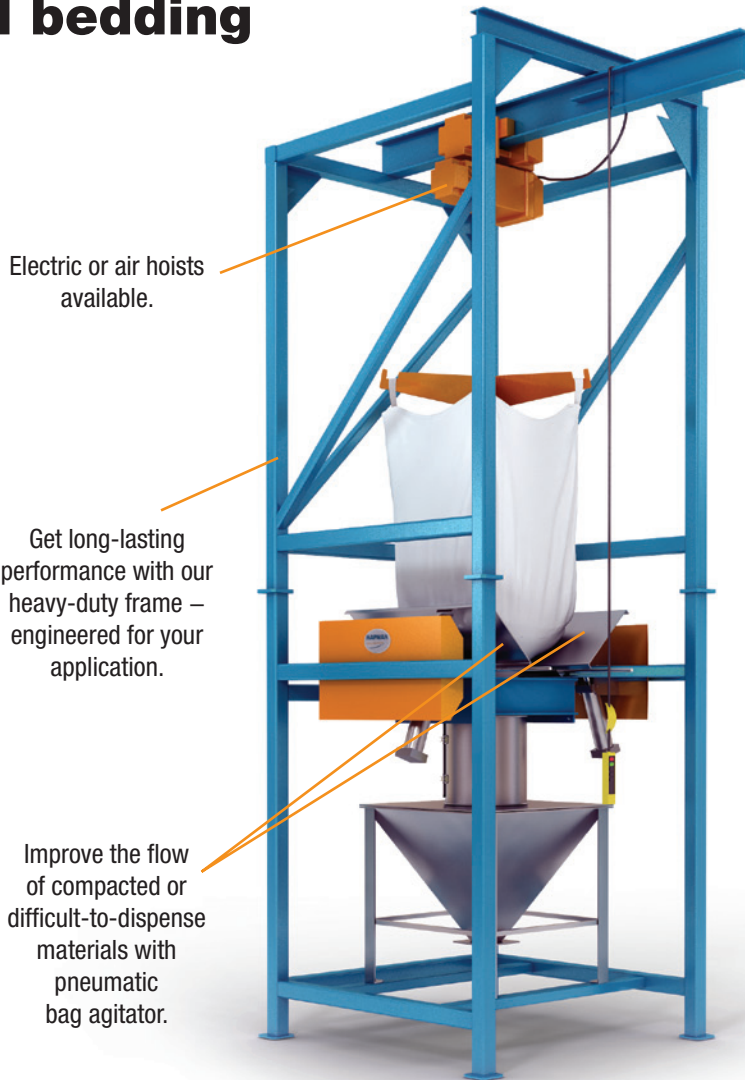

Specifications

- Standard frame: 3 in (7.62 cm) carbon steel 7-gauge square tubing – designed for your application.
- Optional agitator fabricated of carbon or stainless steel requires 5 scfm (0.142 m³/min) at 80 psig (5.62 kg/cm²).
- Trolley motor 0.5 HP, amperage is 1.6 at 460 volts.
- Hoists are 1.2/2.4 hp; amperage is 2.9/5.7 at 460 volts.

Install and operate easily.

- Assures smooth discharge of material.
- Modular components are easily adaptable in a variety of materials to meet your needs.
- Installs and ships easily with our two-piece frame, or fits in tight spaces with our low-profile frame.
- Unloads bags quickly and safely.
- Stainless steel or carbon steel with a variety of finishes including enamel paint, FDA epoxy, Steel It™ and powder-coated.



A true performance guarantee ensuring your Hapman equipment achieves the specific results it was designed and manufactured to deliver. And if you need technical support, call us. We are available 24/7.



800-427-6260 (US/Can) or 269-343-1675
fax 269-349-2477

Contact: sales@hapman.com

HAPMAN[®]

Ideas that move™

www.hapman.com

H-501.A